


WARNING INSTRUCTIONS

CAUTION. APPLY PARKING BRAKE
BLOCK DIAGONALLY OPPOSITE
SIDE. DO NOT GET UNDER CAR WHILE
IT IS BEING USED.

JACK LOCATION FRONT. POSITION LOAD REST
BRACKET IN BUMPER NOTCH. INBOARD OF
BUMPER BRACKET BOLT.

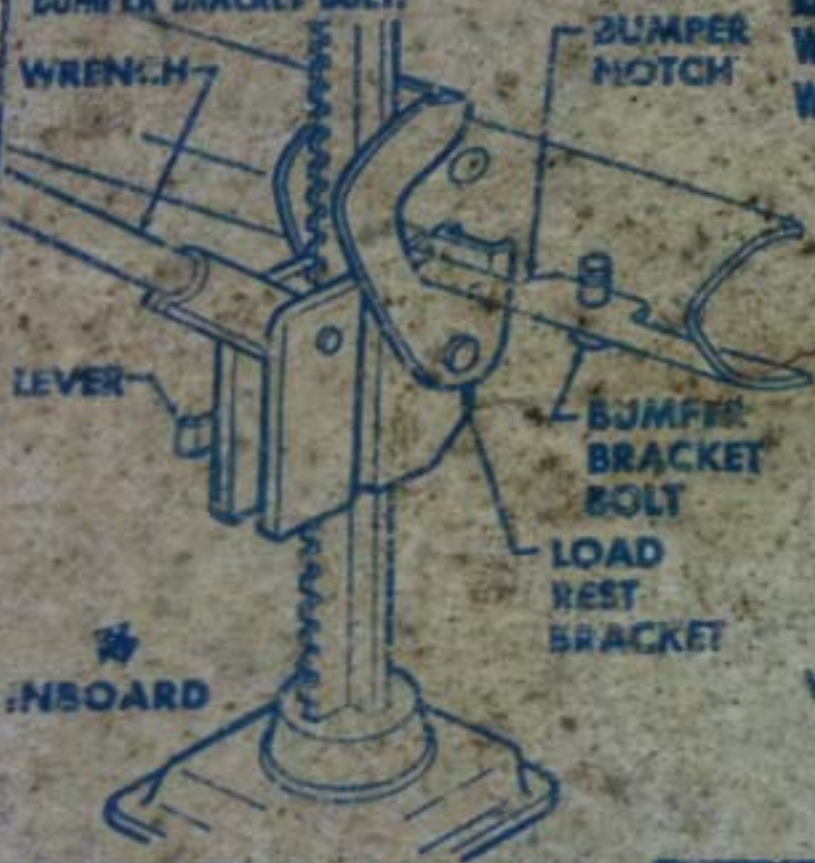

WHEEL REMOVAL REMOVE TRIM COVER W/
WHEEL WRENCH. LOOSEN, BUT DO NOT REMOVE
WHEEL NUTS BEFORE USING JACK.



JACK LOCATION REAR. POSITION
LOAD REST BRACKET AT BUMPER
NOTCH, BELOW BUMPER BRACKET.

JACK OPERATION LEVER AT:
"UP" POSITION TO RAISE CAR.
"DOWN" POSITION TO LOWER CAR.

FORWARD